

# ADHESIVES AND SEALANTS

## Threadlocker and Stud Lock & Bearing Mount



### Features

- Covers all threadlocking applications
- **"Capillary action" gap fill prevents movement of screw threads and eliminates self-loosening**
- **Anti-corrosion formulas prevent rusting of threads**
- **Fast cure without cracking or shrinking**
- **Easy application – no mixing required**
- **Authorized by USDA for use in federally inspected meat/poultry plants**
- **Saves time, money, labor and mess**

### Applications

- **Can be used with all metals, glass, ceramics and most thermoset plastics**

### Threadlocker

**Strong, temporary lock for threaded fasteners**

- Medium-strength adhesive (**blue**)
- General purpose thread locking compound
- Ideal for all nut and bolt applications
- Eliminates self-loosening
- Suitable for temperatures up to 300°F
- Prevents threads from rusting
- Removable with hand tools

P/N 74490 – 0.338 fl. oz.  
P/N 74513 – 1.2 fl. oz.



### Stud Lock & Bearing Mount

**High temperature resistant adhesive for locking studs & bearings**

- High-strength adhesive (**red**)
- For locking and sealing all fasteners up to 1" diameter and bearings
- Ideal where high viscosity, shear strength and rapid cure speed are necessary
- Also ideal for tamper proofing where a difficult removal is desired
- Suitable for temperatures up to 300°F
- Prevents rusting of threads
- Removable with heat and hand tools

P/N 74491 – 0.338 fl. oz.  
P/N 74515 – 1.2 fl. oz.



# Insulating Expandable Foam Sealant



## Features

- A unique one part urethane foam which expands as it dries and solidifies
- Sprays as a liquid then expands and cures to a durable semi-rigid closed cell foam insulation
- Each can dispenses over 800 linear feet of product when sprayed in a 3/8" cured bead
- Forms a water resistant, weather resistant and airtight bond on masonry, wood, metal, glass, & most plastics
- Dries tack free in 10 minutes
- Cures completely in 8 to 24 hours
- Easy to use, conforms to any shape as it expands
- Foam expands 2 to 3 times in size

## Applications

- Fills cracks and holes that caulk won't
- Fills cracks, and plugs holes eliminating energy escape
- Plug the entrance of insect or rodent holes
- Seals out Radon Gas
- Deadens sound when applied to sheet metal

## Use For Insulating & Sealing:

- Air Conditioning
- Ventilation and Heating Ducts
- Plumbing
- Window A/C Units
- Spas
- Hot Tubs
- Boats
- RV's
- Electrical Equipment
- Appliances
- Refrigeration Units
- Carpentry
- Masonry
- Auto/Truck Doors



P/N 74575  
12 oz.

# 4.5" Bristle Discs



**GREEN**  
**50 GRIT**  
**P/N 45703**



**YELLOW**  
**80 GRIT**  
**P/N 45704**



**WHITE**  
**120 GRIT**  
**P/N 45705**



- **Molded, abrasive-filled bristle discs**
- **Get better results, faster than wire brushes**
- **Use on aluminum and other metals**
- **For deburring, blending, finishing, polishing, cleaning and coating**
- **Also for removing defects, scratches and rust**
- **1", 2" and 3" discs and pad holders are also available**



# ***Magnetic Nutsetters*** ***For Drills and Screw Guns***

- ***Magnetic nutsetters firmly hold your hex head bolts, screws, or nuts during driving***
- ***1/4" hex shank with 6" length***
- ***Long length eliminates need for extension in most applications***
- ***Made from shock resistant tool steel***
- ***Heat treated for maximum strength and hardness***
- ***For use with hex head bolts, screws, and nuts***



***P/N 82996 - 1/4" Hex***  
***P/N 82997 - 5/16" Hex***  
***P/N 82998 - 3/8" Hex***  
***P/N 82999 - 7/16" Hex***

# Grip Ties


## Features



- Low profile, one piece fastening devices
- Constructed of polyethylene hook and nylon loop, laminated back to back
- Quick release for repetitive access to cable and wire
- Can be opened and closed numerous times without failure
- Reusable, adjustable, releasable and easy to install
- Design provides ease of installation in tight areas such as telecommunications closets and will not get caught on other cables
- Will not cause damage to Category 5e and Category 6 cable or fiber optic cable since it cannot be over-cinched
- Minimum Tensile Strength
  - 40 lbs (6", 8", 11")
  - 50 lbs (15")

## Applications

Available in a variety of colors and versatile enough for applications ranging from network installations to bundling power cords.

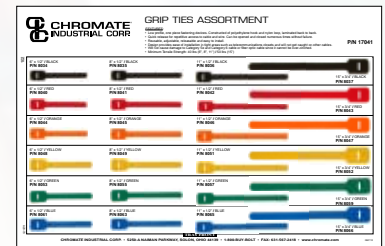

Assortment - P/N 17041

**Black**  
6" x 1/2"  
P/N 8034

**Red**  
6" x 1/2"  
P/N 8040

**Orange**  
6" x 1/2"  
P/N 8044

**Yellow**  
6" x 1/2"  
P/N 8048

**Green**  
6" x 1/2"  
P/N 8053

**Blue**  
6" x 1/2"  
P/N 8061

8" x 1/2"  
P/N 8035

8" x 1/2"  
P/N 8041

8" x 1/2"  
P/N 8045

8" x 1/2"  
P/N 8049

8" x 1/2"  
P/N 8055

8" x 1/2"  
P/N 8063

11" x 1/2"  
P/N 8036

11" x 1/2"  
P/N 8042

11" x 1/2"  
P/N 8046

11" x 1/2"  
P/N 8051

11" x 1/2"  
P/N 8057

11" x 1/2"  
P/N 8065

15" x 3/4"  
P/N 8037

15" x 3/4"  
P/N 8043

15" x 3/4"  
P/N 8047

15" x 3/4"  
P/N 8052

15" x 3/4"  
P/N 8059

15" x 3/4"  
P/N 8066